

ULTA Prime CG

ULTA™ Prime CG cartridge and capsule filters have been designed specifically for high throughput and cost effective bioburden control in the production of biopharmaceuticals where sterilizing grade filtration is not required.

ULTA Prime CG filter cartridges feature an integral meltblown prefilter layer to maximize dirt holding capacity while the polyethersulphone membrane guarantees a bioburden log reduction of greater than 5 giving excellent microbial protection. Ultra Prime CG is an economical alternative to the use of sterilizing grade filtration when sterilization of in-process feedstreams is not required.

ULTA Prime CG filter cartridges and capsules are also ideally suited to prefiltration and bioburden reduction and particulate removal prior to sterilizing grade membrane filters, and provide excellent protection of downstream processing equipment such as chromatography columns and ultrafiltration. The robust construction of ULTA Prime CG guarantees consistent performance on multiple batches.

Features

- *Brevundimonas diminuta* retention of 0.2 µm nominal and an LRV of at least 5 for efficient bioburden reduction and particulate removal
- Additional prefilter layer gives excellent capacity
- Low adsorption of proteins for minimal loss of valuable biopharmaceutical product



Figure 1. ULTA Prime CG filters

Materials of construction

Filtration Membrane: Polyethersulphone

Prefilter Layer: Polyester

Upstream Support: Polyester

Downstream Support: Polyester

Inner Support Core: Polypropylene

Outer Protection Cage: Polypropylene

End caps: Nylon



End Cap Insert: 316 stainless steel

Standard O-rings/Gaskets: Silicone



Typical applications

- Column guard - Reduce bioburden and particulates immediately before chromatography columns
- Sterile filter protection - Prefilter solutions upstream of the sterilizing grade filter
- General bioburden control - Log reduction of bacteria when sterility is not required

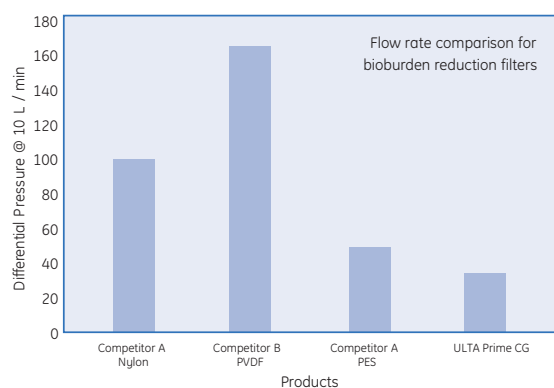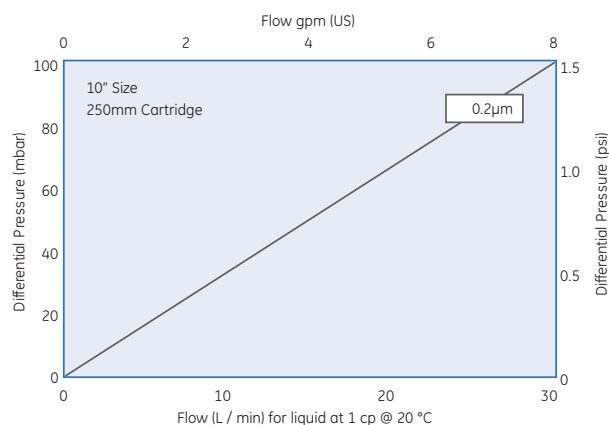

Recommended operating conditions

Up to 70 °C (158 °F) continuous operating temperature and higher short-term temperatures during CIP to the following limits:

Temperature		Maximum dP forward		Maximum dP reverse	
(°C)	(°F)	(bar)	(psi)	(bar)	(psi)
20	68	5.0	72	2.0	29
40	104	4.0	58	1.5	22
60	140	3.0	43.5	1.0	15
80	176	2.0	29	0.5	7
90	194	1.0	15	Not recommended	
>100(steam)	>212(steam)	0.3	4	Not recommended	

Filtration area

0.54 m² (5.8 ft²) per 10" (250 mm) module.

Cleaning and sterilization

ULTA Prime CG filter cartridges can be repeatedly steam sterilized in situ or autoclaved at up to 130 °C (288 °F). They can be sanitized with hot water at up to 90 °C (194 °F) and are compatible with a wide range of chemicals.

For detailed operational procedures and advice on cleaning and sterilization, please contact the Technical Support Group through your usual GE Healthcare contact.

Biological safety

Materials conform to the relevant requirements of 21CFR Part 177 and current USP Plastics Class VI - 121 °C and ISO10993 equivalents.

Non-volatile extractables (NVE)

Total NVE's extracted in the first 5 liter flush of WFI for a 10 inch pre autoclaved cartridge is < 6 mg.

Oxidizable substances

ULTA Prime CG filter cartridges meet current USP quality standards for oxidizable substances.

TOC/Conductivity

The effluent quality from a 10 inch ULTA Prime CG conforms to the requirements of USP 28<643>(TOC) and USP 28<645>(conductivity) following a 3 liter flush.

Endotoxins

Aqueous extracts from the ULTA Prime CG contain < 0.125 Eu/ml when tested in accordance with the standard LAL test.

Retention characteristics

ULTA Prime CG filter cartridges are validated to give an LRV of at least 5 when challenged with *Brevundimonas diminuta* in accordance with methods specified in ASTM F838-05 (10⁷ organisms / cm² minimum). Typical in-house challenge levels are in the order of 10¹¹ per 10 inch module.

Integrity test data

Test Pressure: 24.7 psig (1.7 barg). Water wet @ 20°C.

Device	Diffusional flow mL/min
10 inch cartridge	16
5 inch cartridge	7.6
6 inch capsule	6.1
4 inch capsule	3.0
2 inch capsule	1.4

Cartridges

Device Type	Media Type		Special	Detail		Micron Rating		Size	Code Cartridge		O-ring			
Digit 1	2	3	4	5	6	7	8	9	10	11	12			
C = Cartridge D = Disc	M	p	Hyphen -	C	G	9	2	H = 5" 1 = 10" 2 = 20" 3 = 30"	0 = Code 0, 222 Double O-ring/ 7 = Code 7, 226 Locking Tab, Double O-ring/ Fin* (Flat Top 5" Only)	0	E = EPDM S = Silicone			
										Hyphen	4	7	0	Disc

Example: ULTA™ Prime CG, 226 (code 7), 10", Silicone O-ring
CMP-CG92170S

Capsules

Device Type	Media Type		Special	Detail		Micron Rating		Size	Size	End Fittings	
Digit 1	2	3	4	5	6	7	8	9	10	Inlet 11	Outlet 12
K = Capsule	M	p	Hyphen -	C	G	9	2			T = 1.5" TC G = SHB* H = 1/2" HB	T = 1.5" TC G = SHB* H = 1/2" HB
										* Stepped Hose Barb 1/4"	
										<div style="border: 1px solid black; padding: 5px; display: inline-block;"> 02 = 2" 04 = 4" 06 = 6" </div>	

Example: ULTA™ CAP, 4", 1/2 Hose barb inlet, Triclamp 1 1/2" out
KMP-CG9204HT

www.gelifesciences.com/filtration

GE Healthcare Bio-Sciences AB
Björkgatan 30, 751 84 Uppsala, Sweden

GE, imagination at work and GE monogram are trademarks of General Electric Company. ULTA is a trademark of GE Healthcare companies.

All goods and services are sold subject to the terms and conditions of sale of the company within GE Healthcare which supplies them. A copy of these terms and conditions is available on request. Contact your local GE Healthcare representative for the most current information.

© 2007 General Electric Company - All rights reserved.

GE Healthcare Bio-Sciences AB, a General Electric Company.

GE Healthcare Europe GmbH
Munzinger Strasse 5, D-79111 Freiburg, Germany

GE Healthcare UK Ltd
Amersham Place, Little Chalfont, Buckinghamshire, HP7 9NA, UK

GE Healthcare Bio-Sciences Corp
800 Centennial Avenue, P.O. Box 1327
Piscataway, NJ 08855-1327, USA

GE Healthcare Bio-Sciences KK
Sanken Bldg. 3-25-1, Hyakunincho, Shinjuku-ku,
Tokyo 169-0073, Japan

Asia Pacific Tel +65 6275 1830 Fax +65 6275 1829 Australasia Tel + 61 2 9899 0999 Fax +61 2 9899 7511 Austria Tel 01/57606-1619 Fax 01/57606-1627 Belgium Tel 0800 73 888 Fax 02 416 82 06 Canada Tel 800 463 5800 Fax 800 567 1008
Central, East, & South East Europe Tel +43 1 972720 Fax +43 1 97272 2750 Denmark Tel 45 16 2400 Fax 45 16 2424 Finland & Baltics Tel +358 (0)9 512 39 40 Fax +358 (0)9 512 39 439 France Tel 01 69 35 67 00 Fax 01 69 41 96 77
Germany Tel 089 96281 660 Fax 089 96281 620 Greater China Tel +852 2100 6300 Fax +852 2100 6338 Italy Tel 02 27322 1 Fax 02 27302 212 Japan Tel +81 3 5331 9336 Fax +81 3 5331 9370 Latin America Tel +55 11 3933 7300 Fax +55 11 3933 7304
Middle East & Africa Tel +30 210 9600 687 Fax +30 210 9600 693 Netherlands Tel 0800 82 82 82 1 Fax 0800 82 82 82 4 Norway Tel 815 65 555 Fax 815 65 666 Portugal Tel 21 417 7035 Fax 21 417 3184 Russia & other C.I.S. & N.I.S Tel +7 (495) 956 5177
Fax +7 (495) 956 5176 Spain Tel 93 594 49 50 Fax 93 594 49 55 Sweden Tel 018 612 1900 Fax 018 612 1910 Switzerland Tel 0848 8028 12 Fax 0848 8028 13 UK Tel 0800 616928 Fax 0800 616927 USA Tel 800 526 3593 Fax 877 295 8102



imagination at work